



MADE IN CHINA
Distributed by Jasco Products Company LLC,
10 E. Memorial Rd., Oklahoma City, OK 73114.
This Jasco product comes with a 1-year limited
warranty details. Visit www.byjasco.com for
Questions? Contact our U.S.-based Consumer
Care at 1-800-654-8483 between 7AM-8PM,
M-F, Central Time.
For product patent information, visit
www.byjasco.com/patents.

79181 v1 05/09/23

WARNING

- KEEP BATTERIES AWAY FROM SMALL CHILDREN.
- BATTERIES CAN EXPLODE OR LEAK IF INSTALLED IN REVERSE, DISASSEMBLED, CHARGED OR EXPOSED TO FIRE OR HIGH TEMPERATURE.
- REMOVE BATTERIES IF THE PRODUCT WILL NOT BE USED FOR EXTENDED PERIODS.
- CAUSING INJURY AND PRODUCT DAMAGE.
- BATTERIES MAY LEAK HARMFUL LIQUIDS OR IGNITABLE MATERIALS OR EXPLODE.
- DO NOT MIX OLD AND NEW OR OTHER BATTERY TYPES.
- REPLACE ALL BATTERIES AT THE SAME TIME.
- REPLACE FULLY DISCHARGED BATTERIES IMMEDIATELY.
- THE PRODUCT IS NOT DESIGNED TO BE USED AS A GRAB BAR. DO NOT MOUNT IN LOCATIONS WHERE THIS PRODUCT IS LIKELY TO BE USED AS A GRAB BAR.
- USE CAUTION WHEN DRILLING INTO WALLS TO AVOID DRILLING INTO ELECTRICAL AND PLUMBING LINES HIDDEN WITHIN THE WALL. IF UNSURE, CONTACT A PROFESSIONAL INSTALLER FOR INSTALLATION.

- CLEANING**
- Clean with mild soap and warm water. Completely dry the surface with a clean, soft cloth.
 - Do not clean with harsh or abrasive cleaners such as ammonia, chlorine or toilet cleaner. Do not dry with a coarse cloth.

In low light conditions, the LED will activate when motion is detected within a 15ft., 120° range. The LED will turn off 60 seconds after motion stops.

NOTE: The LED only turns on in low light conditions. If the room is fully lit, the LED may not turn on.

OPERATION

Thank you for your purchase!

Instructions
made easy



Read instructions or watch
easy-to-follow video.

Scan code or visit
byjasco.com/79181

Register your
product



Receive exclusive deals and
register your product.

Scan code or visit
byjasco.com/deals



Like our product?
Leave a review
on your favorite
retailer website or
amazon.com.




Having Problems?
Let us know how
we can help.
Call 1-800-654-8483
between 7AM-8PM,
M-F, Central Time.



Discover more bathroom
décor lighting solutions at
enbrightenme.com.

enbrighten®

Motion-Sensing Towel Ring Light User Manual

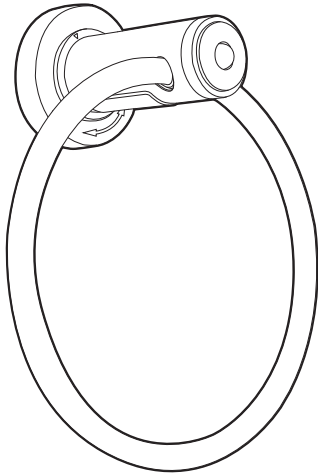


INSTALLATION


Install the towel ring light using the included screws and anchors. Ensure the mounting surface is clean, dry and able to support the product. Read all safety instructions and warnings before installing. Keep this manual for later use.

NOTE: While it's possible to mount this product to many different surface types, solid wood, drywall to wood stud, or masonry mounted installations will yield the best results.

INCLUDED HARDWARE

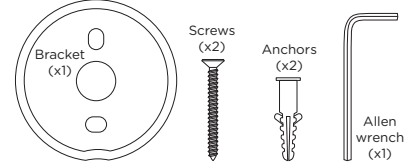






RECOMMENDED TOOLS

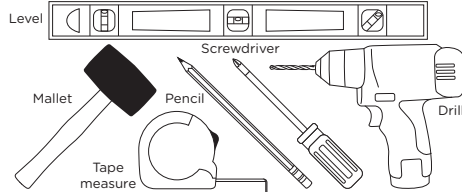


NOTE: The indent on the mounting bracket determines where the light will point. For example: the light will point towards the floor if the bracket is installed with the indent facing down.

SCREWS AND ANCHORS

1. Hold the bracket against the mounting surface with the indent facing the light's intended direction. Mark screw locations using a pencil.
2. Drill pilot holes on each marking using the 1/8in. drill bit.
3. If installing on a stud, continue to Step 4. If installing on drywall, plaster or tile, use a 7/32in. drill bit to enlarge the pilot holes. Insert anchors into pilot holes using a mallet.
4. Thread screws through holes on bracket.

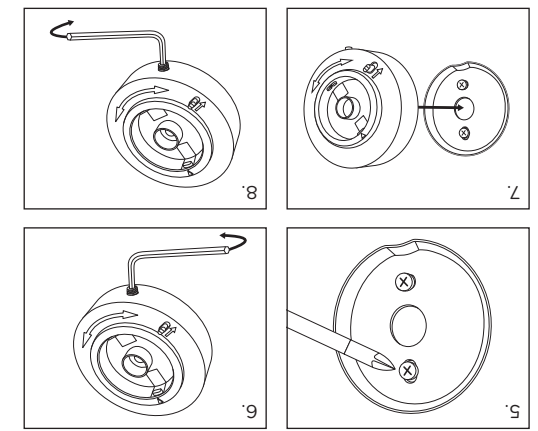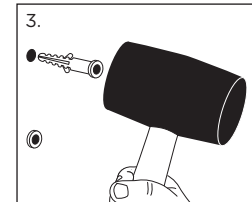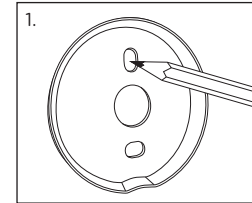

5. Use a #2 Phillips-head screwdriver to fasten the bracket with screws. Ensure indent faces light's intended direction.
6. Use Allen wrench to loosen base screw.
7. Align base screw with the bracket's indent. Seat base onto bracket.
8. Fasten base screw with Allen wrench until product is firmly in place — do not overtighten.

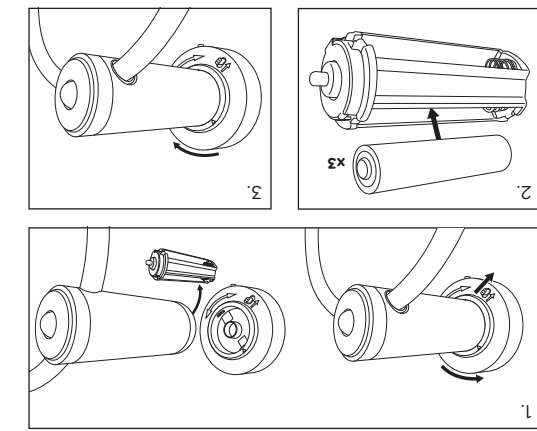

- BATTERIES**
1. Slide and hold the unlock button. While still holding the unlock button, twist the post counterclockwise to separate it from the base. The battery cartridge is located inside the post.
 2. Insert 3 AAA batteries into each compartment, noting polarity.
 3. Reinsert the battery cartridge into the post and twist clockwise to lock them back into position.

Distribuido por Jasco Products Company LLC,
10 E. Memorial Rd., Oklahoma City, OK 73114,
HECHOS EN CHINA

Este producto de Jasco tiene una garantía
limitada de año. Para más información sobre
la garantía, visite www.jasco.com.

¿Tiene preguntas? Póngase en contacto con
nuestro servicio de atención al consumidor de
Jasco. Llame al 1-800-654-8484, de lunes a viernes,
de 7 a. m. a 6 p. m. (hora estándar del centro).
Visite www.jasco.com/países para
información sobre la patente del producto.