

GE Z-Wave Plug-In Dual Outlet Smart Switch with USB Charging



Specifications

Power: 120VAC, 60Hz **Signal Frequency:** 908.4/916

Maximum load (Total): 120VAC, 600W Incandescent, 1/2HP Motor, 1560W (13A) Resistive

USB Output: 5.2VDC MAX 2.4A each USB. MAX total 3.4A both USB

Range: Up to 150 feet from controller or closest Z-Wave device

Operating Temperature: 32-104° F (0-40° C)

Warranty: 2-year limited product warranty

For Indoor Use Only

Design Features

- Turn the connected device On/Off manually via Z-Wave remote control
- Remotely monitor with any mobile device*
- Can be Included in multiple Groups and Scenes
- Remote Control Turn ON/OFF connected lighting manually or via smartphone or tablet
- Multi-Purpose 2 USB Ultra Charge** ports (3.4A) are available on each side of the device
- Dual Outlets Wirelessly control both outlets simultaneously or independently†
- Home Automation Can be set up to control scenes or used in a scheduled event
- OTA (Over-the-Air) Updateable Utilizes the Z-Wave Firmware Update Meta Data command class for standardized wireless firmware updates
- Visit <http://www.ezwave.com/hubs/> for hub compatibility
- Trilingual Instruction manual – (English, French, Spanish)

Z-Wave Plus Features


- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

* Requires Z-Wave hub or controller, functions may vary depending on brand.

** Ultra Charge safely charges up to 40% faster than traditional 5.0V USB chargers. Results will vary by device & connected cable.

† Independent control requires hub with multi-channel support



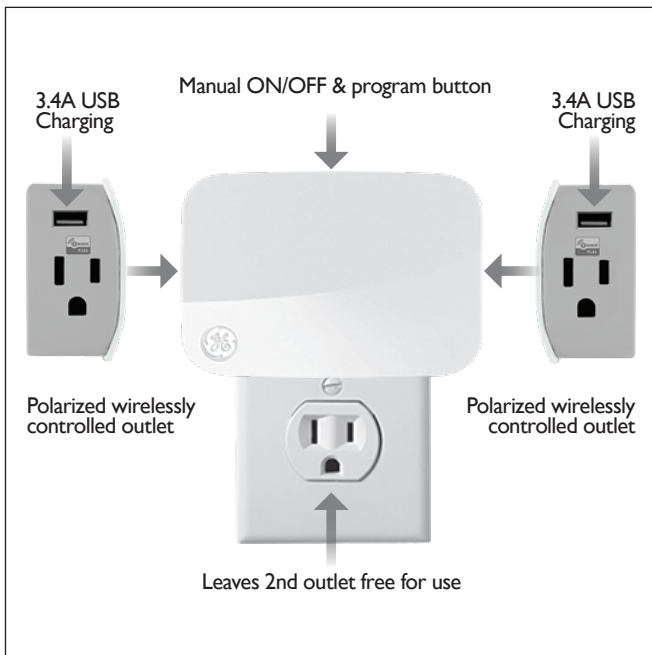

Device Configuration

Adding your device to a Z-Wave network

Once the hub is ready to add your smart switch, press and release the top button on the smart switch to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the top button on the smart switch to remove it from the network.

To return to factory defaults

If plugged in, unplug from the receptacle. Press and hold the top button for at least 3 seconds while you plug the dimmer into the receptacle.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

Two Outlet Smart Switch plus Two USB

Wirelessly control both outlets independently†

Related Products - GE Z-Wave Plug-In Smart Controls



28169
Plug-In Smart
Switch



28167
Plug-In Smart
Dimmer



14282
Plug-In Dual
Outlet Smart
Switch



14280
Plug-In Dual
Outlet Smart
Dimmer



28175
Plug-In Dual
Outlet Smart
Dimmer with
USB Charging



14284
Plug-In Outdoor
Smart Switch