


# Enbrighten Zigbee Plug-in Dual-Outlet Smart Switch

enbrighten®

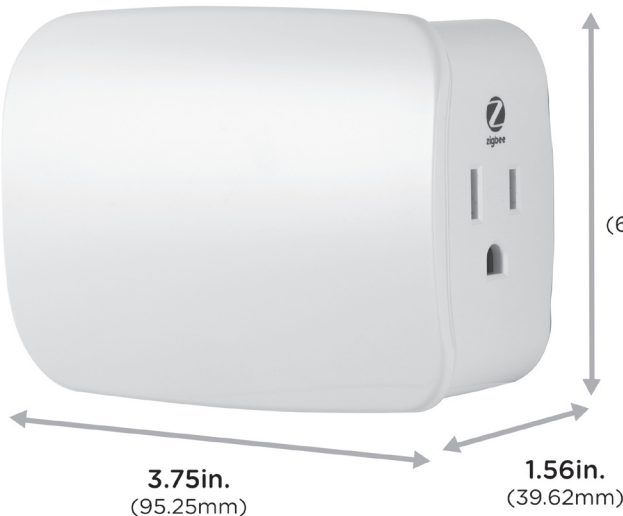

## Specifications

**Power:** 120VAC, 60Hz **Signal Frequency:** 2.4Ghz

**Maximum load for the Zigbee-controlled outlets:**

600W (5A) incandescent/1/2HP motor or 1800W (15A) resistive  
Zigbee controlled outlet is fused @ 5A. This fuse is not user serviceable

**Range:** Up to 150ft. from controller or closest Zigbee device

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 5-year limited product warranty

**For indoor use only**

## Design Features

- Remote ON/OFF control via the Zigbee controller
- Manual ON/OFF control with the top push button
- Works with Google and Alexa (requires compatible hub\*)
- Can be included in multiple groups and scenes
- Two Zigbee-controlled AC outlets
  - Both outlets controlled together (cannot be controlled independently)
- Space-efficient design
- Does not block the lower outlet when plugged in to the upper outlet of a duplex wall receptacle – assumes that the duplex receptacle is mounted with the ground pin down.
- Plugs and cords route to the side allowing close placement of furniture
- Over-the-air updates – once joined to your Zigbee network, the smart switch can automatically receive updates through your Zigbee gateway
- Zigbee 3.0 certified for simple pairing and integrated home automation

- Visit [ezzigbee.com/hubs](http://ezzigbee.com/hubs) for hub compatibility
- Trilingual instruction manual – English, French, Spanish


## Zigbee Features

- Effortless device pairing to Zigbee certified gateways
- Backward compatible with all generations of Zigbee devices
- Supports wireless upgrades to future-proof your home

\* Requires Zigbee hub or controller – functions may vary depending on brand.

**Two-Outlet Smart Switch**

Wirelessly control both outlets simultaneously

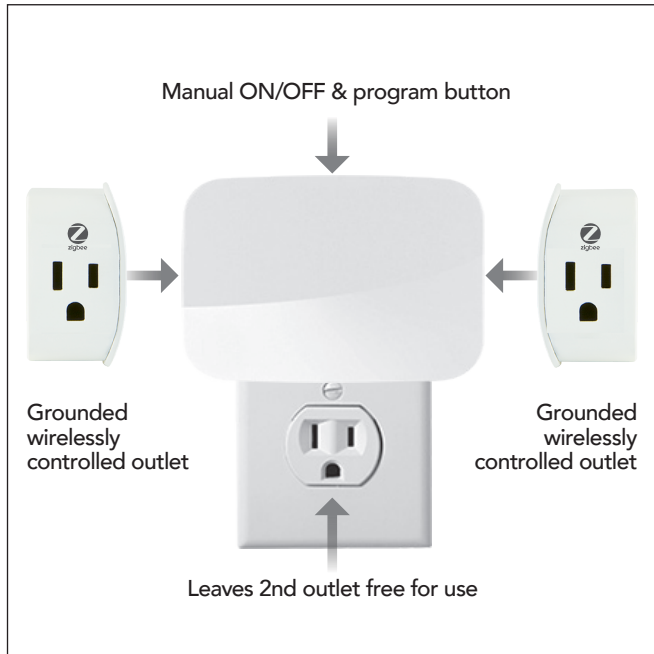

**Device Configuration**

**Adding your devices to a Zigbee network**

Once the hub is ready to add the smart switch, pairing begins automatically when power is supplied. The switch appears in the controller’s menu when paired.

**To remove and reset the device**

Choose to remove the lighting device as instructed by your hub. The controller indicates the smart switch was removed.

**To return to factory defaults**

If plugged in, unplug the switch. Press the program button while plugging in the switch – must release button within four seconds of plugging in the switch.

**Certifications & Compliances**



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2020

V1 3/22/20

**Related Products – Enbrighten Zigbee Smart Controls**

- |  |  |  |  |   |  |  |   |
|--|--|--|--|---|--|--|---|
|  |  |  |  |   |  |  |   |
| <b>43096</b><br>Plug-In<br>Dual-Outlet<br>Smart Dimmer | <b>43100</b><br>Plug-in<br>Outdoor<br>Smart Switch | <b>43076</b><br>In-Wall<br>Smart Switch,<br>Paddle | <b>43077</b><br>In-Wall<br>Smart Switch,<br>Paddle 120/277 | <b>43084</b><br>In-Wall Smart<br>Switch, Toggle | <b>43080</b><br>In-Wall<br>Smart Dimmer,<br>Paddle | <b>43090</b><br>In-Wall<br>Smart Dimmer,<br>Toggle | <b>43102</b><br>In-Wall<br>Smart Outlet |