

MOTION LED SECURITY & ACCENT LIGHT QUICK START GUIDE: OPERATION

WARNING: Read all **SAFETY INSTRUCTIONS** and entire **USER MANUAL** before attempting to assemble, install or operate this light fixture.






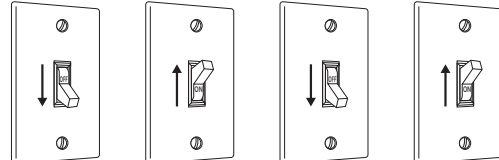

NOTE: After turning on power to the light fixture, allow the motion sensor to completely warm up (~40 sec) before beginning the setup process. The light will initially turn on at the daylight (DL) color during the warm-up period, then will turn off and operate according to the switch settings below.

Desired Light Operation	Switch Settings
Accent light all night long	<p>Accent Light → Set to D2D Choose WW: Warm white, 2200K CCT SW: Soft white, 3000K CCT BW: Bright white, 4000K CCT DL: Daylight, 5000K CCT Security Light → Set to 20min Security Light → Set to 15'</p>
Security light all night long	<p>Accent Light → Set to Off Accent Light → Set to WW Security Light → Choose security on time - 1min, 5min or 20min Security Light → Choose distance sensitivity - 15', 30', 50' or 70'</p>
Accent light for early evening, Security light for late night	<p>Accent Light → Choose accent time - 3hr or 6hr Choose WW: Warm white, 2200K CCT SW: Soft white, 3000K CCT BW: Bright white, 4000K CCT DL: Daylight, 5000K CCT Security Light → Choose security on time - 1min, 5min or 20min Security Light → Choose distance sensitivity - 15', 30', 50' or 70'</p>
Test mode	<p>Test 1min 5min 20min → Set to Test</p>
Manual accent light override mode	<p>Turn the switch OFF-ON within 3 seconds</p>
Manual security light override mode	<p>Turn the switch OFF-ON-OFF-ON within 3 seconds</p>
Turn off manual override mode	<p>Turn the switch OFF-ON within 3 seconds</p>

GUÍA RÁPIDA DE FUNCIONAMIENTO DE LA LUZ LED DE SEGURIDAD Y ACENTUACIÓN ACTIVADA POR MOVIMIENTO

ADVERTENCIA: Lea todas las INSTRUCCIONES DE SEGURIDAD y el MANUAL DEL USUARIO completo antes de ensamblar, instalar o poner en funcionamiento esta luminaria.

NOTA: Una vez conectado el suministro eléctrico a la iluminaria, deje que se caliente por completo (~40 segundos) antes de comenzar el proceso de configuración. La luz se encenderá al color diurno (DL) durante el período de calentamiento, luego se apagará y funcionará de acuerdo a la configuración establecida a continuación.

Funcionamiento deseado de la luz	La configuración
Luz de acentuación toda la noche	 <p> Off 3hr 6hr D2D Accent Light → Configuración a D2D (anochecer a amanecer) WW SW BW DL Elegir color de acentuación - WW: Blanco cálido, 2200K CCT - SW: Blanco suave, 3000K CCT - BW: Blanco brillante, 4000K CCT - DL: Luz natural, 5000K CCT Test 1min 5min 20min Security Light → Configuración a 20min 15' 30' 50' 70' Security Light → Configuración a 15' </p>
Luz de seguridad toda la noche	 <p> Off 3hr 6hr D2D Accent Light → Configuración a Off WW SW BW DL Accent Light → Configuración a WW Test 1min 5min 20min Security Light → Elegir tiempo de seguridad - 1min, 5min or 20min 15' 30' 50' 70' Security Light → Elegir sensibilidad de distancia - 15', 30', 50' or 70' </p>
Luz de acentuación para las primeras horas de la noche, Luz de seguridad para las últimas horas de la noche	 <p> Off 3hr 6hr D2D Accent Light → Elegir tiempo de acentuación - 3hr o 6hr WW SW BW DL Elegir color de acentuación - WW: Blanco cálido, 2200K CCT - SW: Blanco suave, 3000K CCT - BW: Blanco brillante, 4000K CCT - DL: Luz natural, 5000K CCT Test 1min 5min 20min Security Light → Elegir tiempo de seguridad - 1min, 5min or 20min 15' 30' 50' 70' Security Light → Elegir sensibilidad de distancia - 15', 30', 50' or 70' </p>
Modo de prueba	 <p> Test 1min 5min 20min Security Light → Configuración a Test </p>
Modo de anulación manual de la luz de acentuación	 <p>Mover el interruptor de apagado a encendido (ON-OFF) dentro de 3 segundos</p>
Modo de anulación manual de la luz de seguridad	 <p>Mover el interruptor de apagado a encendido a apagado a encendido (ON-OFF) dentro de 3 segundos</p>
Apagado del modo de anulación manual	 <p>Mover el interruptor de apagado a encendido (ON-OFF) dentro de 3 segundos</p>