



Wireless Starter Kit

User's Manual

- Enclosed you will find**
- (1) Wall Mount Control
 - Double-Sided Tape / Screws (for mounting)
 - (1) Indoor Outlet Adapter

The GE Smart Remote Plus advantage
Any transmitter in the GE Smart Remote Plus product line is capable of controlling every receiver—the ultimate in home convenience. Control any number of light fixtures or appliances from up to 150ft* away by choosing the transmitter and receiver combination that best suits your needs.

⚠ WARNING

Risk of electric shock

- Keep children away
- Use indoors only
- Do not use in wet locations

Risk of fire


- Do not exceed electrical ratings




The following GE Smart Remote Plus transmitters (sold separately) can control your receiver:



The transmitters above can also control the following GE Smart Remote Plus receivers (sold separately):

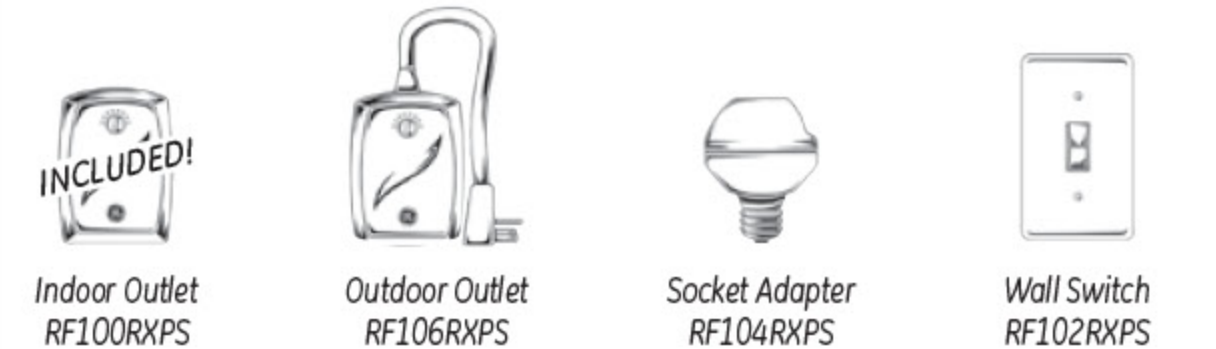

IMPORTANT! These devices are NOT compatible with devices from other systems. You must purchase Smart Remote Plus transmitters and receivers to ensure compatibility.

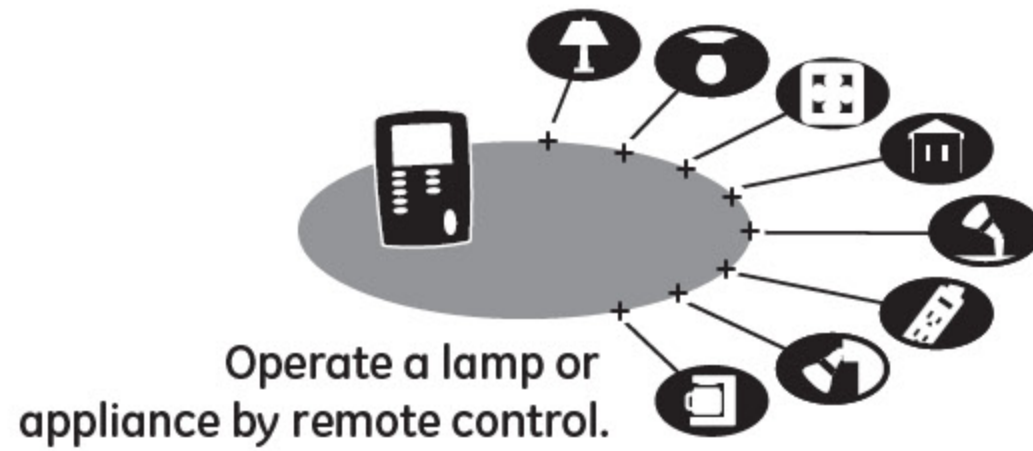

Area	CH	Transmitters	Receivers
Bedroom	1	Bedside - Wall Mount Control Entrance - Wall Mount Control	(2) Bedside Lamps - (2) Socket Adapters Corner Torchiere - Indoor Outlet Adapter Overhead Light Fixture - Wall Switch Entertainment System - Indoor Outlet Adapter
			Living Room
Basement	4	Entrance - Wall Mount Control	
			Garage
Outdoor	6	Foyer - Wall Mount Control Car Keys - Key Chain Remote	
			Kitchen

GE is a trademark of the General Electric Company and is used under license to Jasco Products Company LLC, 311 N.W. 122nd Street, Oklahoma City, OK 73114. www.jascoproducts.com.


90 DAY LIMITED WARRANTY: Jasco Products Company warrants this product to be free from manufacturing defects for a period of ninety days from the original date of consumer purchase. This warranty is limited to the repair or replacement of this product only and does not extend to consequential or incidental damage to other products that may be used with this unit. This warranty is in lieu of all other warranties express or implied. Some states do not allow limitations on how long an implied warranty lasts or permit the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights which vary from state to state. If unit should prove defective within the warranty period, return prepaid with dated proof of purchase to:

Jasco Products Company
311 N.W. 122nd
Oklahoma City, OK. 73114

Operating Instructions - Indoor Outlet Adapter

FOR INDOOR USE ONLY


1. Remove the small tab on the back of unit labeled HOUSE CODE using a small screwdriver.
2. Set the HOUSE CODE to any one of the following settings:

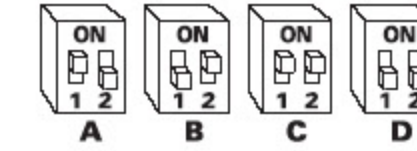

NOTE: Make sure ALL your GE Smart Remote Plus devices have the same HOUSE CODE setting. The transmitters WILL NOT control the receivers if they have different HOUSE CODE settings.

IMPORTANT! HOUSE CODES help eliminate interference (devices randomly turn on/off). If you experience interference, change the HOUSE CODE on all your GE Smart Remote Plus transmitters and receivers to a different setting.

3. Replace the HOUSE CODE tab.
4. Set the CHANNEL by using the knob on front as shown.



NOTE: If you set your Indoor Outlet Adapter to CHANNEL 1, the unit can be controlled using any transmitter set to CHANNEL 1. If you set your Indoor Outlet Adapter to CHANNEL 2, the unit can be controlled using any transmitter set to CHANNEL 2 ... and so on.

IMPORTANT! A transmitter will control a receiver ONLY if they have the same HOUSE CODE and CHANNEL settings.

5. Plug Indoor Outlet Adapter into a powered, grounded 125VAC outlet.
6. Plug the lamp / appliance you wish to control into the Indoor Outlet Adapter as shown.


The following are examples of devices you can control with your Indoor Outlet Adapter:



CAUTION: WHEN THE INDICATOR LIGHT IS ON, THE OUTPUT OUTLET IS POWERED. DO NOT CONNECT / DISCONNECT DEVICES TO / FROM THE OUTLET ONCE IT IS POWERED.

Operating Instructions - Wall Mount Control

1. Find the slot labeled HOUSE CODE on the back of the unit.
2. Set the HOUSE CODE to any one of the following settings:
3. Set the CHANNEL by using the knob on front as shown.



NOTE: If you set your Wall Mount Control to CHANNEL 1, the unit can control any receiver set to CHANNEL 1. If you set your Wall Mount Control to CHANNEL 2, the unit can control any receiver set to CHANNEL 2 ... and so on.



4. Mounting

NOTE: Mounting the Wall Mount Control on masonry or metal walls may degrade the functional range.

Tape Mounting

- A. Make sure surfaces are free of dust, oil and other substances that could affect adhesion.
- B. Attach the double-sided tape to back of the Wall Mount Control housing.
- C. Press tape firmly to the mounting surface.

Screw Mounting

- A. Using a slotted screwdriver, remove the faceplate of the Wall Mount Control.
- B. Place the detached back plate where desired and mark screw locations.
- C. Insert the mounting screws into the back plate holes and screw into place.
- D. Replace the Wall Mount Control faceplate.

5. Use the toggle button to activate the Wall Mount Control (ON/OFF operation). Make sure to press firmly and for a minimum of 1 second for best results. An indicator lights RED when a signal is sent.

6. Using any of the receivers set to the same CHANNEL and HOUSE CODE, test the installation by using the ON and OFF buttons.

If your unit does not work properly or if you want additional assistance, please call 1-800-443-4924. We would be happy to answer ALL of your questions. Visit us on the web at www.GESmartHome.com to download application notes, manuals and to find out more about the GE SmartHome™ product line!

Specifications - Wall Mount Control

Battery Type Use ONLY A23 (12V) Alkaline

NOTE: The functional range will decrease as the battery wears out so make sure to replace the battery every 6 months for best results.

Specifications - Indoor Outlet Adapter

FOR INDOOR USE ONLY
DO NOT EXCEED ELECTRICAL RATINGS

Electrical Rating 120V, 60Hz
Maximum Resistive Load 1200W
Maximum Tungsten Load 600W
Maximum Motor Load 1/3HP

*Functional range may be adversely affected by one or more of the following factors: weather, radio frequency interference, low transmitter battery and obstructions between the transmitter and receiver.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference, and;
2. This device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Made in China for GE Home Electric Products,