


# Enbrighten Zigbee Outdoor Plug-in Smart Switch

enbrighten®

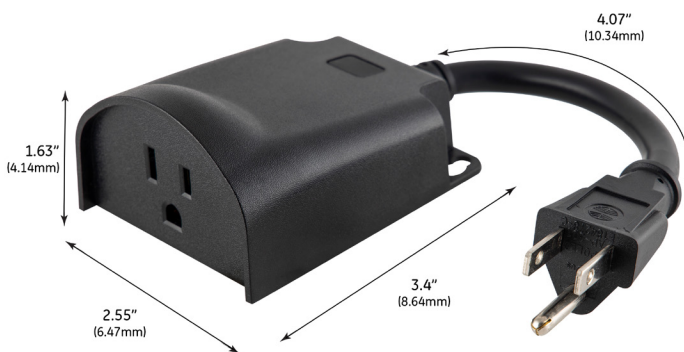

## Specifications

**Power:** 120VAC, 60Hz **Signal Frequency:** 2.4GHz  
Maximum load for the Zigbee-controlled outlet: 600W (5A) incandescent/1/2 HP motor or 1800W (15A) resistive  
Zigbee controlled outlet is fused @ 5A. This fuse is not user serviceable

**Range:** Up to 150ft from controller or closest Zigbee device

**Operating Temperature:** 14-104° F (-10-40° C)

**Warranty:** 5-year limited product warranty

**Degree of Protection:** Type 3R

**For outdoor or indoor use**

## Design Features

- Remote ON/OFF control via the Zigbee controller
- Manual ON/OFF control with the manual program button
- Works with Google and Alexa (requires compatible hub\*)
- Can be included in multiple groups and scenes
- One Zigbee remote controlled AC outlet
- Weather-and-impact resistant housing suitable for use outdoors in damp or wet conditions
- Includes mounting hardware
- Over-the-air updates – once joined to your Zigbee network, the smart switch can automatically receive updates through your Zigbee gateway
- Zigbee 3.0 certified for simple pairing and integrated home automation
- Black color
- Visit [ezzigbee.com/hubs](http://ezzigbee.com/hubs) for hub compatibility
- Trilingual Instruction manual – (English, French, Spanish)

## Zigbee Features

- Effortless device pairing to Zigbee certified gateways
- Backward compatible with all generations of Zigbee devices
- Supports wireless upgrades to future-proof your home

\* Requires Zigbee hub or controller – functions may vary depending on brand.



**Device Configuration**

**Adding your devices to a Zigbee network**

Once the hub is ready to add the smart switch, pairing begins automatically when power is supplied. The switch appears in the controller’s menu when paired.

**To remove and reset the device**

Choose to remove the lighting device as instructed by your hub. The controller indicates the smart switch was removed.

**To return to factory defaults**

If plugged in, unplug the switch. Press the program button while plugging in the switch –must release button within four seconds of plugging in the switch

**Certifications & Compliances**











Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2020

V1 3/22/20

**Related Products – Enbrighten Zigbee Smart Controls**

- |  |   |   |   |   |  |   |   |
|--|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| <b>43094</b><br>Plug-In<br>Dual-Outlet<br>Smart Switch                             | <b>43096</b><br>Plug-In<br>Dual-Outlet<br>Smart Dimmer                              | <b>43076</b><br>In-Wall<br>Smart Switch,<br>Paddle                                  | <b>43077</b><br>In-Wall<br>Smart Switch,<br>Paddle 120/277                          | <b>43084</b><br>In-Wall Smart<br>Switch, Toggle                                     | <b>43080</b><br>In-Wall<br>Smart Dimmer,<br>Paddle                                   | <b>43090</b><br>In-Wall<br>Smart Dimmer,<br>Toggle                                    | <b>43102</b><br>In-Wall<br>Smart Outlet   |