myTouchSmart Sunsmart **All-in-One Timer**







4.06"

(10.31cm)

settings

current setting and blends in with other switches

Specifications

Power: 120VAC, 60Hz Signal Frequency: 60Hz

Maximum Load: 1200W tungsten, Ballast 1200VA, Electronic Ballast

5A, 1/2HP motor, 1800W (15A) resistive Maximum Traveller Length: 200 ft.

Operating Temperature: 32-104 °F (0-40 °C)

Operating Humidity: 5-85%

Minimum Hole for Wire: #12 AWG (0.081 dia) and #14 AWG wire

Warranty: 1-year limited product warranty

Requires neutral wire. Switch must be mounted indoors.

Design Features

· Simple myTouchSmart Programming

· SunSmart Technology -Automatically adjusts to sunrise and sunset times in your region

· 24 Hour Countdown Mode

· 7-Day - Daily or Weekly Settings

· 8 Custom my ON/my OFF

· ON/OFF button overrides the

- · Single Pole and 3-Way
- · Easy Installation Screw terminals, no flying leads
- Rechargable NiMH battery automatically saves settings and is a back up battery for up to 30 days
- Works with LED, CFL, Incandescent & Halogen
- Light up backlight


White/light almond covers included




ON/OFF switch program buttons

opens to reveal


Single-pole Wiring

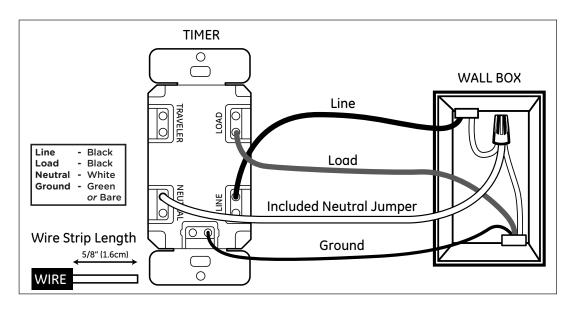

Timer on LOAD Side 3-way Installation

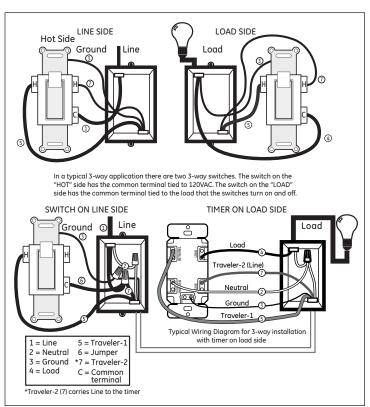


Timer on LINE Side 3-way Installation

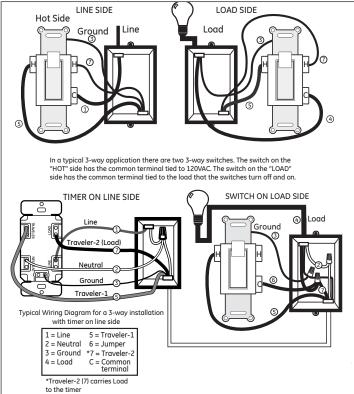

Additional Installation Information

- · Indoor use only
- · Wallplates sold separately
- · Trilingual instruction manual English, French, Spanish
- · Visit myTouchSmart.com for more information

Device Configuration

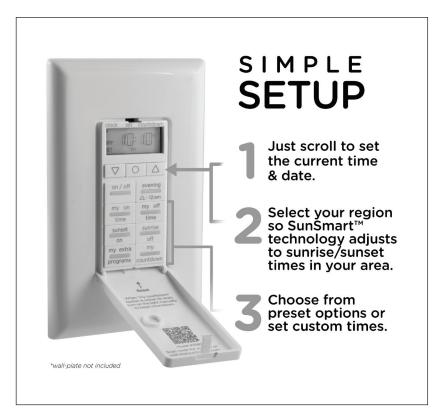

Certifications & Compliances





Compliances, specifications and availability are subject to change without notice Distributed by Jasco Products Company LLC 10 E. Memorial Rd., Oklahoma City, OK ©Jasco 2018

Related Products - myTouchSmart In-Wall Wi-fi Timers



41149 In-Wall Wi-fi Smart Dimmer



41150 Plug-in Wi-fi Smart Outlet



41147 In-Wall Wi-fi Smart Switch

Simple Set In-Wall Timer



26893 Simple Set In-Wall Timer

For additional myTouchSmart products visit myTouchSmart.com